

accucold

Professional Cold Storage

Precise • Stable • Efficient • Whisper Quiet

Designed and Purpose-Built for

PHARMACY • MEDICAL • LIFE SCIENCE
LABORATORY • PHARMACEUTICAL • BIOTECH



accucold

The Accucold Difference

Accucold, a division of Felix Storch, Inc., specializes in manufacturing purpose-built refrigeration products for the medical, pharmaceutical, laboratory, and institutional industries. Our extensive product selection offers a range of cooling solutions, from basic locking compact refrigerators to built-in vaccine storage units specially designed to comply with **CDC and VFC guidelines with rapid shipping of stocked products**. We are **ISO 9001:2015 certified** and maintain an **ISO/IEC 17025:2017 certified** calibration laboratory for our monitoring equipment, including the industry's largest selection of equipment certified to the **NSF/ANSI 456 Vaccine Storage Standard**.



MED/LAB/PHARMACY REFRIGERATION

Performance Series Highlights.....	3
About the Performance Series	4
New Options for Optimized Storage & Security.....	5
Pharma-Vac Performance Series Refrigerators	6-7
Pharma-Vac Series Approved to NSF/ANSI 456 Vaccine Storage Standard	8-9
Pharma-Vac Performance Series Freezers	10-11
Pharma-Lab Performance Series Refrigerators & Freezers	12-13
Med-Lab Performance Series Refrigerators.....	14-15
MED2/VAC Series All-Freezers.....	16
Stacked Refrigerator-Freezer Combinations.....	17
Ultra Low Temperature Freezers	18
Low Temperature Chest Freezers.....	19
Controlled Room Temperature Cabinets	20-21

PATIENT CARE/HOSPITAL/BREAK ROOM

Icemakers & Ice/Water Dispensers.....	22
JCAHO Compliant Nutrition Centers.....	23
Break Room Series Refrigerator-Freezers.....	24
Microwaves & Microwave-Refrigerators.....	25
MOMCUBE® Series Breast Milk Refrigeration	26-27
PureTherm Blanket Warmers.....	28
Portable Refrigerator/Freezers.....	29

GENERAL PURPOSE/NSF-7 REFRIGERATION

Healthcare & General Purpose Refrigerators & Freezers (Compact/Undercounter)	30
Healthcare & General Purpose Refrigerators & Freezers (Mid/Full-Size)	31

OPTIONS & ACCESSORIES	32-33
-----------------------------	-------

Performance Series Refrigeration

Solid & glass door choices from 1 to 49 cu.ft.

Purpose-built with advanced features to help support CDC and VFC guidelines for proper vaccination storage:

Keyed lock for secure interior

Intelligent microprocessor control panel with password protection

Optimized forced air cooling for fast temp. recovery

Digital display of the current & hi/lo temp.

Silver ion-coated handle provides protection from germs & microbes

LED lighting for an efficient display

Self-closing user-reversible door

Adjustable plastic-coated wire shelves

Durable interior construction from powder-coated steel

Audible alarms for hi/lo temp., power out, & open door

Remote contacts

Access port

Buffered probe in glycol-filled bottle



EXTENDED WARRANTY
• 2-year parts & labor
• 5-year compressor



ECO-FRIENDLY
Environmentally friendly hydrocarbon refrigerants



COMPATIBLE
with Pyxis®, Omnicell®, & AcuDose RX®



ADA OPTION
32" high choices for use under lower ADA compliant counters

Adjustable operating control range: 2 to 8°C • Temperature variation: +/- 1°C*

*The published temperature variation is derived from the maximum deviation of an NTC sensor in a 1 oz. vial located nearest the chamber geometric center during a 24-hour test period

MED/LAB/PHARMACY REFRIGERATION

Accucold's Performance Series features purpose-built equipment specially designed and constructed to meet the demanding storage needs of medical, laboratory, vaccine, and life science applications.

Performance Series


Professional Grade Performance for Pharmacy, Patient Care, Life Science, & Laboratories



Advanced Temperature Control


Stability and Uniformity - Intelligent control system utilizes an advanced system design to ensure limited deviations from the setpoint and uniform temperatures throughout the entire unit.

Rapid Recovery - Optimized air flow for fast temperature recovery after door openings.

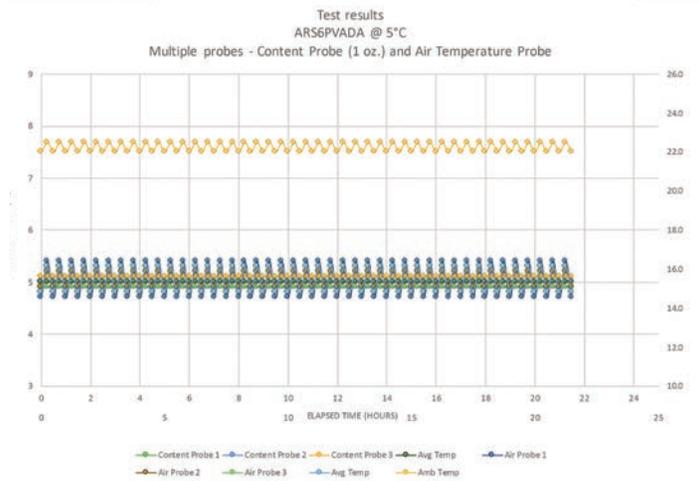

Whisper QUIET


Noise Reduction Design - Preferred by noise-sensitive areas of a pharmacy, patient care facility, or laboratory. Accucold's Performance Series refrigerators are up to 3x quieter than traditional models.

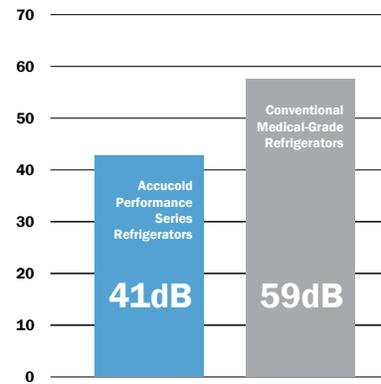

Green Natural Refrigerants


Earth-Saving Natural refrigerants are environmentally-friendly with no impact on ozone depletion and minimal global warming potential.

Global Warming Potential (GWP) of Used Refrigerant

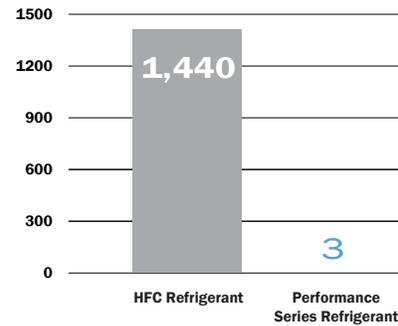

Energy Conservation

Energy Savings - Natural refrigerators provide up to a 15% reduction in energy use. When combined with intelligent control, advanced system design, and optimized air flow, this results in potentially more than 50% in energy savings over competitive units.

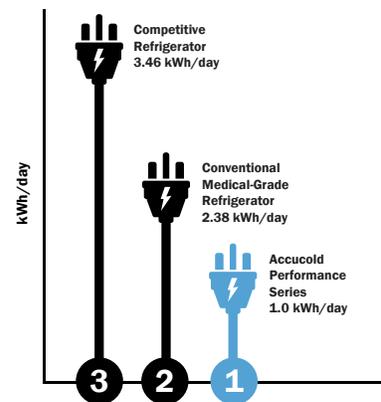

New Options for Optimized Storage & Security

Ventilated Drawers

Full-extension removable drawers made from powder-coated aluminum, factory-installed in any 24" wide Pharma-Vac or Med-Lab refrigerator



Suffix "DR"

Locker Compartments

Interior lockers secured by combination locks for separated storage. Staff can set their own security code and override with provided keys



Suffix "Locker"

Keyless Access Locks

No keys required with a keypad security system that allows you to program up to 19 codes to accommodate your staff. Available as a factory-installed option on all Performance Series units



Add Option "KAL"

Digital Data Loggers

NIST calibrated loggers with internal storage and removable USB drives for virtually unlimited data storage. Loggers are calibrated in our ISO/IEC 17025:2015 certified laboratory and display the current and min/max temperatures in Celsius and Fahrenheit



Add Option "DL2B"

■ All units can be combined with Accucold freezers using our stacking racks

*Specifications are subject to change without notice. For the most current information, visit accucold.com

Pharma-Vac Performance Series Refrigerators

Purpose-built for pharmacy, medication, and vaccination applications to support meeting CDC/VFC vaccine storage guidelines



Advanced Temperature Control

- Intelligent microprocessor** digital temperature controller
- Improved temperature accuracy** with a buffered probe in glycol-filled bottle to simulate temperature of stored product
- Additional sensor** reads interior air temperature for superior temperature control
- Adjustable operating control range** from +2°C to +8°C (+35.6°F to +46.4°F)
- Digital display** of the min/max temperature (updated in 15 minute increments)
- Temperature viewable in Celsius and Fahrenheit** to the nearest tenth of a degree
- Password protection** of control parameters beyond setpoint
- Optimized forced air cooling** for excellent temperature stability and uniformity with rapid recovery after door openings and product loading



Multiple Alarms For Safer Monitoring

- Audible/visual alarms** for high/low temperature excursions
- Open door alarm** sounds if the door is left ajar (default 4 minutes with selectable 1-99 minute range)
- Audible power failure** and sensor failure alarms
- Mute function** for alarms
- Remote alarm** contacts in rear of the unit




Fully Featured Interior For Convenient Storage

- Energy efficient LED lighting** with internal on/off switch
- Adjustable plastic-coated wire shelves** for improved circulation
- Multiple shelf positions** spaced at 1/2" to allow flexible adjusting to support smaller items
- Adjustable cycle defrost** operation
- 1/2" **probe port** included to accept user-provided monitoring equipment



Quality Design For Reliable Performance

- Hospital grade cord** with a green dot plug
- Antimicrobial sliver ion-coated handle** for added protection from germs
- Self-closing door** offers added storage protection
- User-reversible door swing** (self-closing function compatible with RHD position only)
- Environmentally-friendly** natural hydrocarbon refrigerant for reduced global warming potential
- Meets EPA and SNAP** requirements
- Convenient security** with a top-mounted door lock (2 keys included)
- Magnetic gaskets** to ensure a positive seal
- Compatible with** Pyxis®, Omnicell® and AcuDose RX®

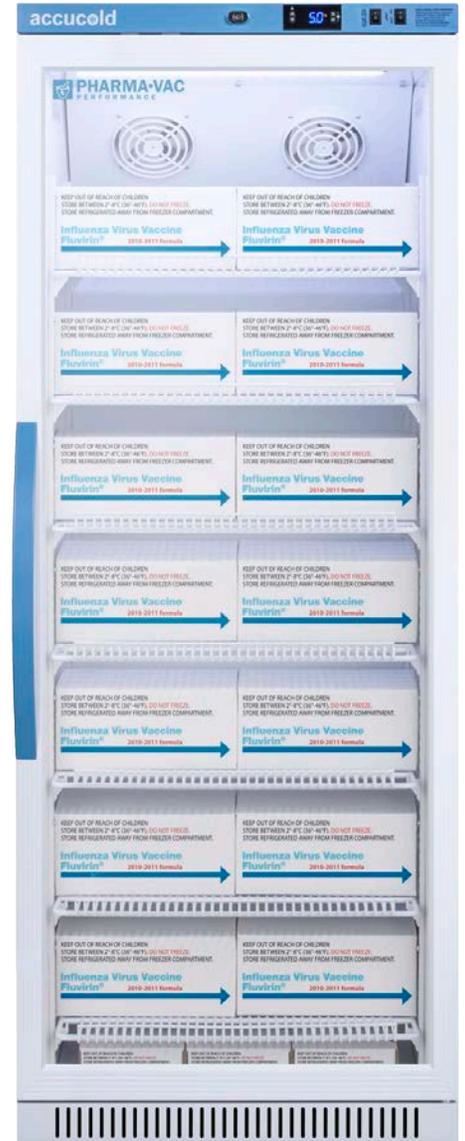

SKU: ARG12PV



Remote contacts



Temperature sensor in glycol bottle



Microprocessor digital temperature control

PHARMA-VAC PERFORMANCE

New Options Available

- Keyless Locks
- Interior Lockers
- Ventilated Drawers

See Page 5



Technical Specifications (All Units):

Defrost type: Cycle
Thermostat: Intelligent microprocessor digital
Temperature sensors: 2 (air probe & buffered probe)
Adjustable operating control range: 2 to 8°C (35.6 to 46.4°F)
Temperature variation: +/- 1°C*
Shelving: Adjustable white plastic coated wire
Voltage: 115V/60 Hz
Cord: NEMA 5-15P
Lock: Factory-installed key lock
Refrigerant: Eco-friendly R600a or R290a
Light: LED
Access port: ½"

Door: Reversible
Fan: Internal
Certifications: ETL, ETL-C
Parts & Labor Warranty: 2 years
Compressor warranty: 5 years

Included with units:
 2 keys
 Do Not Unplug removable sticker
 Do Not Adjust Temperature removable sticker
 Do Not Store Personal Items removable sticker
 User manual

DESIGNED TO PROVIDE +/-1 °C VARIATION
 The published temperature variation is derived from the maximum deviation of an NTC sensor in a 1 oz. vial located nearest the chamber geometric center during a 24 hour test period.

100% GUARANTEE
Extended Warranty
 2-year parts & labor
 5-year compressor

Eco-Friendly
 Uses environmentally friendly hydrocarbons for a greener footprint

Compatible
 with Pyxis®, Omnicell®, & AcuDose RX®

Logging Option
 Add our D2LB data logger for additional assurance


	SOLID DOOR SKU	GLASS DOOR SKU	CAPACITY	H x W x D	INSTALLATION	CABINET	SHELVES	AMPERAGE	SHIPPING WT.
🔒	ARS1PV	ARG1PV	1 cu.ft.	21.5" x 17.5" x 19.75"	Freestanding	White	3	0.6	73 lbs
🔒	ARS2PV	ARG2PV	1.94 cu.ft.	22" x 18.5" x 25"	Freestanding	White	2	0.6	86 lbs
🔒	ARS32PVBIADA	ARG31PVBIADA	2.83 cu.ft.	32" x 18.5" x 22.63"	Recessed	White	4	0.6	113 lbs
🔒	ARS3PV	ARG3PV	3 cu.ft.	34" x 18.5" x 19"	Freestanding	White	4	0.6	120 lbs
🔒	ARG6PV	ARS6PV	6 cu.ft.	32.5" x 23.38" x 24.38"	Freestanding	White	4	0.75	125 lbs
🔒	ARS62PVBIADA	ARG61PVBIADA	6 cu.ft.	31.75" x 23.38" x 25"	Recessed	White	4	0.75	125 lbs
🔒	ARS8PV	ARG8PV	8 cu.ft.	50" x 23.38" x 24.38"	Freestanding	White	7	1.4	175 lbs
🔒	ARS12PV	ARG12PV	12 cu.ft.	61.75" x 23.38" x 24.38"	Freestanding	White	7	1.4	190 lbs
🔒	ARS15PV	ARG15PV	15 cu.ft.	72" x 23.38" x 24.38"	Freestanding	White	7	1.4	215 lbs
🔒	ARS15PVLOCKER	ARG15PVLOCKER	15 cu.ft.	72" x 23.38" x 24.38"	Freestanding	White	8 lockers	1.4	250 lbs
🔒	ARS18PV	ARG18PV	18 cu.ft.	78.5" x 27.5" x 28"	Freestanding	White	7	1.5	295 lbs

■ All units can be combined with Accucold freezers using our stacking racks

*Specifications are subject to change without notice. For the most current information, visit accucold.com

Performance Series

Refrigeration Certified to NSF/ANSI 456
Vaccine Storage Standard

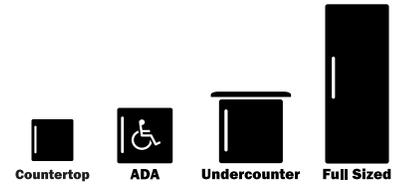

Purpose-built Pharma-Vac series tested and **approved by an ANSI accredited laboratory** to conform to the latest industry standard

NOTE: This unit has the same feature packages as the Pharma-Vac series (page 6-7) but include a 2-year certificate of calibration. Products in this series have been tested and certified to NSF/ANSI 456.

Temperature excursions can affect the viability of vaccines, so choosing the right refrigerators and freezers that have been designed and purpose built for the application is extremely important. They must also be tested and approved for vaccine storage to help ensure vaccine viability and provide a high level of safety.

A new standard was developed by the NSF Joint Committee (comprised of CDC Members and manufacturing/pharmaceutical experts) on Vaccine Storage. This new NSF/ANSI 456 Vaccine Storage Standard was created to help define temperature performance attributes for vaccine storage units and to challenge refrigerators and freezers manufacturers with testing and performance protocols designed around real-world use applications common in demanding healthcare environments.

Testing includes confirming temperature performance during a series of short, frequent door openings to simulate regular use, as well as long, extended door openings to simulate

events such as inventory counts or cleaning that may require the door to remain open for up to several minutes.

The standard acknowledges that how vaccines are loaded into refrigerators and freezers may affect performance, so units must pass performance criteria loaded and unloaded. In addition, all potential storage locations are considered to ensure there are no hot or cold spots that may allow vaccines to go out of CDC recommended temperature ranges. Temperature measurements are taken in 15 locations during the testing to confirm consistent performance.

With the new standard published, vaccine refrigerator and freezer manufacturers may now submit their equipment to third-party ANSI-accredited labs that can test and certify equipment to the NSF/ANSI 456 Vaccine Storage Standard. Accucold is proud to lead the industry with the largest line of cold storage product sizes certified to NSF/ANSI 456 Vaccine Storage* standard. The Performance-456 Series

supports meeting regulations and guidelines from the CDC, State Agencies, World Health Organization, and other health ministries on vaccine storage and handling.

The Purpose-Built Performance Series delivers the performance and quality you need, in addition to the tight temperature control, low sound and exceptional features to meet the most demanding cold storage applications.



***Note for NSF/ANSI 456 compliance, units must be ordered with a certificate of calibration as designated by "456" in the model number.**



PHARMA-VAC PERFORMANCE

New Options Available

- Keyless Locks
- Interior Lockers
- Ventilated Drawers

See Page 5



ARG1PV456

ARS3PV456

ARG8PV456

ARS18PV456

Technical Specifications (All Units):

Defrost type: Cycle
Thermostat: Intelligent microprocessor digital
Temperature sensors: 2 (air probe & buffered probe)
Adjustable operating control range: 2 to 8°C (35.6 to 46.4°F)
Temperature variation: +/-1.0°C*
Shelving: Adjustable white plastic coated wire
Voltage: 115V/60 Hz
Cord: NEMA 5-15P
Lock: Factory-installed key lock
Refrigerant: Eco-friendly R600a or R290a
Light: LED
Access port: ½"

Door: Reversible
Fan: Internal
Certifications: ETL, ETL-C, NSF/ANSI 456
Parts & Labor Warranty: 2 years
Compressor warranty: 5 years

Included with units:
 2 keys
 Do Not Unplug removable sticker
 Do Not Adjust Temperature removable sticker
 Do Not Store Personal Items removable sticker
 User manual
 2-year certificate of calibration

NSF/ANSI 456 Certified Temperature measurements taken in 15 locations during testing to confirm consistent performance. Testing includes a series of door openings during both loaded and unloaded operation.



Extended Warranty
 2-year parts & labor
 5-year compressor



Eco-Friendly
 Uses environmentally friendly hydrocarbons for a greener footprint



Compatible
 with Pyxis®, Omnicell®, & AcuDose RX®



Logging Option
 Add our D2LB data logger for additional assurance

	SOLID DOOR SKU	GLASS DOOR SKU	CAPACITY	H x W x D	INSTALLATION	CABINET	SHELVES	AMPERAGE	SHIPPING WT.
🔒	ARS1PV456	ARG1PV456	1 cu.ft.	21.5" x 17.5" x 19.75"	Freestanding	White	3	0.6	70 lbs
🔒	ARS2PV456	ARG2PV456	1.94 cu.ft.	22" x 18.5" x 25"	Freestanding	White	2	0.6	86 lbs
🔒	ARS32PVBIADA456	ARG31PVBIADA456	2.83 cu.ft.	32" x 18.5" x 22.63"	Recessed	White	4	0.6	113 lbs
🔒	ARS3PV456	ARG3PV456	3 cu.ft.	34" x 18.5" x 19"	Freestanding	White	4	0.6	100 lbs
🔒	ARS6PV456	ARG6PV456	6 cu.ft.	32.5" x 23.38" x 24.38"	Freestanding	White	4	0.75	120 lbs
🔒	ARS62PVBIADA456	ARG61PVBIADA456	6 cu.ft.	31.75" x 23.38" x 25"	Recessed	White	4	0.75	125 lbs
🔒	ARS8PV456	ARG8PV456	8 cu.ft.	50" x 23.38" x 24.38"	Freestanding	White	7	1.4	170 lbs
🔒	ARS12PV456	ARG12PV456	12 cu.ft.	61.75" x 23.38" x 24.38"	Freestanding	White	7	1.4	185 lbs
🔒	ARS15PV456	ARG15PV456	15 cu.ft.	72" x 23.38" x 24.38"	Freestanding	White	7	1.4	215 lbs
🔒	ARS18PV456	ARG18PV456	18 cu.ft.	78.5" x 27.5" x 28"	Freestanding	White	7	1.5	295 lbs

■ All units can be combined with Accucold freezers using our stacking racks

*The published temperature variation is derived from the maximum deviation of an NTC sensor in a 1 oz. vial located nearest the chamber geometric center during a 24 hour test period.

Pharma-Vac Performance Series Freezers

Designed and purpose-built for pharmacy, medication, and vaccination applications to support meeting CDC/VFC vaccine storage guidelines



Advanced Temperature Control

- Intelligent microprocessor** digital temperature controller
- Improved temperature accuracy** with a buffered probe in glycol-filled bottle to simulate temperature of stored product
- Additional sensor** reads interior air temperature for superior temperature control
- Adjustable operating control range** from -30°C to -10°C (-22°F to +14°F)
- Digital display** of the min/max temperature (updated in 15 minute increments)
- Temperature viewable in Celsius and Fahrenheit** to the nearest tenth of a degree
- Password protection** of control parameters beyond setpoint



Multiple Alarms For Safer Monitoring

- Audible/visual alarms** for high/low temperature excursions
- Open door alarm** sounds if the door is left ajar (default 4 minutes with selectable 1-99 minute range)
- Audible power failure** and sensor failure alarms
- Mute function** for alarms
- Remote alarm** contacts in rear of the unit



Fully Featured Interior For Convenient Storage

- Energy efficient** LED lighting with internal on/off switch
- Adjustable** plastic-coated wire shelves for improved circulation
- Multiple** shelf positions spaced at 1/2" to allow flexible adjusting to support smaller items
- Static** manual defrost cooling
- 1/2" **probe port** included to accept user-provided monitoring equipment



Quality Design For Reliable Performance

- Hospital grade cord** with a green dot plug
- Powder-coated handle** with naturally occurring silver ions to reduce the spread of germs
- Self-closing door** offers added storage protection
- User-reversible door swing** (self-closing function compatible with RHD position only)
- Environmentally-friendly** natural hydrocarbon refrigerant for reduced global warming potential
- Meets EPA and SNAP** requirements
- Convenient security** with a top-mounted door lock (2 keys included)
- Magnetic gaskets** to ensure a positive seal
- Pyxis®, Omnicell® and AcuDose RX®** compatible



Remote contacts



Temperature sensor in glycol bottle



Microprocessor digital temperature control

PHARMA-VAC PERFORMANCE FREEZER

New Options Available

- Keyless Locks

See Page 5



AFZ2PVBIADA



AFZ5PVBIADA



Technical Specifications (All Units):

Defrost: Manual
Thermostat: Intelligent microprocessor digital
Temperature Sensors: 2 (air probe and buffered probe)
Adjustable Operating Control Range: -30°C to -10°C (-22°F to +14°F)
Shelving: White plastic coated wire
Voltage: 115V/60Hz
Cord: NEMA 5-15P
Lock: Factory-installed key lock
Handle: Silver-coated antimicrobial coating
Refrigerant: Eco-friendly R290a

Light: LED
Access Port: ½”
Door: Reversible
Fan: Internal
Certifications: ETL, ETL-C
Parts & Labor Warranty: 2 years
Compressor Warranty: 5 years

Included with units:
 DO NOT UNPLUG warning sticker
 DO NOT ADJUST TEMPERATURE warning sticker
 DO NOT STORE PERSONAL ITEMS warning sticker

DESIGNED TO PROVIDE +/-1 °C VARIATION
 The published temperature variation is derived from the maximum deviation of an NTC sensor in a 1 oz. vial located nearest the chamber geometric center during a 24 hour test period.



Extended Warranty
 2-year parts & labor
 5-year compressor



Eco-Friendly
 Uses environmentally friendly hydrocarbons for a greener footprint



Compatible
 with Pyxis®, Omnicell®, & AcuDose RX®



Logging Option
 Add our D2LB data logger for additional assurance

SKU	CAPACITY	H x W x D	INSTALLATION	DOOR	CABINET	SHELVES	AMPERAGE	SHIPPING WT.
AFZ1PV	1.5 cu.ft.	22" x 18.5" x 25"	Freestanding	White	White	2	1.3	86 lbs
AFZ2PVBIADA	2.47 cu.ft.	32" x 19.75" x 22.63"	Recessed	White	White	4	1.3	110 lbs
AFZ5PVBIADA	3.88 cu.ft.	31.75" x 23.38" x 25"	Recessed	White	White	4	1.3	165 lbs

All units can be combined with Accucold freezers using our stacking racks

*Specifications are subject to change without notice. For the most current information, visit accucold.com

Pharma-Lab Performance Series

Refrigerators and freezers designed and **purpose-built to meet the demanding needs for pharmacy, medication, vaccine, laboratory, and life science applications**



Advanced Temperature Control

- Intelligent microprocessor** digital temperature controller
- Precise temperature control** supports meeting the CDC/VFC storage guidelines
- Improved temperature accuracy** with a separate temperature probe for continuous product readout
- Additional sensor** reads interior air temperature for superior temperature control
- Adjustable operating control range;** Refrigerators: +2°C to +10°C (+35.6° F to +50° F)/ Freezers: -30°C to -15°C (-22°F to +5°F)
- Digital display** of the min/max temperature (updated in 15 minute increments)
- Temperature viewable in Celsius or Fahrenheit** to the nearest degree
- Optimized forced air cooling** for excellent temperature stability and uniformity with rapid recovery after door openings and product loading



Multiple Alarms For Safer Monitoring

- Audible/visual alarms** for high/low temperature excursions
- Open door alarm** will sound at different levels when the door is left ajar for times starting at 30 seconds
- Condenser cleaning alarm** sends audible and visual signal every six months



Fully Featured Interior For Convenient Storage

- Adjustable plastic-coated wire shelves** for improved circulation
- Multiple shelf positions** spaced at 1/2" to allow flexible adjusting to support smaller items
- Interior LED lighting** for an energy efficient presentation
- Adjustable cycle defrost** operation



Quality Design For Reliable Performance

- Complete stainless steel construction** inside and out for easier cleanup
- Glass door models** feature anti-condensate door frame heater to ensure a clear view
- Self-closing door** helps to protect contents, but will also remain open when the door is opened at a 90° angle for easier loading
- Ships with 6" high commercial locking casters** for optional installation
- Factory-installed locks** located towards the top of the unit for convenient security
- Sealed back** for a space-saving design that's easier to clean
- Environmentally-friendly natural hydrocarbon refrigerant** for reduced global warming potential
- Meets EPA and SNAP** requirements
- Quality door gaskets** ensure a tight seal for energy savings and improved performance



SKU: ARG23ML



6" high locking castors



Adjustable shelving



Microprocessor digital temperature control



ARS23ML



ARG49ML



AFS49ML

Technical Specifications (All Units):

Defrost type: Cycle
Thermostat: Intelligent microprocessor digital
Temperature sensor: 2 (air probe & product probe)
Adjustable operating control range: 2 to 10°C (refrigerators)/-30 to -15°C (freezers)
Shelving: White plastic coated wire
Voltage: 115V/60Hz
Cord: NEMA 5-15P
Lock: Factory-installed key lock
Refrigerant: Eco-friendly R600a (refrigerators)
 Eco-friendly R290a (Freezers)
Light: LED

Door: RHD/LHD or French (double door)
Fan: Internal
Certifications: UL, UL-C
Parts & Labor Warranty: 2 years
Compressor Warranty: 5 years

Included with units:
 2 keys
 User manual

Designed to operate within +/-1.5°C (Refrigerators) or +/-2.5°C (Freezers) of setpoint. Freezers with auto defrost may see temperature excursions beyond this during defrost. The published temperature variation is derived from the maximum deviation of a NTC sensor in 1 oz. vial located nearest the chamber geometric center during a 24hr test period.



Extended Warranty
 2-year parts & labor
 5-year compressor



Eco-Friendly
 Uses environmentally friendly hydrocarbons for a greener footprint



Logging Option
 Add our D2LB data logger for additional assurance

Refrigerators

SKU	CAPACITY	H x W x D	DOOR(S)	CABINET	DOOR SWING	SHELVES	AMPERAGE	SHIPPING WT.
ARS23ML	23 cu.ft.	83.75" x 27.5" x 31"	(1) Stainless Steel	Stainless Steel	RHD	4	7.5	292 lbs
ARS23MLLH	23 cu.ft.	83.75" x 27.5" x 31"	(1) Stainless Steel	Stainless Steel	LHD	4	7.5	292 lbs
ARG23ML	23 cu.ft.	83.75" x 27.5" x 31"	(1) Glass	Stainless Steel	RHD	4	7.5	292 lbs
ARG23MLLH	23 cu.ft.	83.75" x 27.5" x 31"	(1) Glass	Stainless Steel	LHD	4	7.5	292 lbs
ARS49ML	49 cu.ft.	83.75" x 55.25" x 31"	(2) Stainless Steel	Stainless Steel	French	8	7.5	430 lbs
ARG49ML	49 cu.ft.	83.75" x 55.25" x 31"	(2) Glass	Stainless Steel	French	8	7.5	450 lbs


Freezers

SKU	CAPACITY	H x W x D	DOOR(S)	CABINET	DOOR SWING	SHELVES	AMPERAGE	SHIPPING WT.
AFS23ML	23 cu.ft.	83.75" x 27.5" x 31"	(1) Stainless Steel	Stainless Steel	RHD	4	8	292 lbs
AFS23MLLH	23 cu.ft.	83.75" x 27.5" x 31"	(1) Stainless Steel	Stainless Steel	LHD	4	8	292 lbs
AFS49ML	49 cu.ft.	83.75" x 55.25" x 31"	(2) Stainless Steel	Stainless Steel	French	8	10.5	450 lbs

*Specifications are subject to change without notice. For the most current information, visit accucold.com

Med-Lab Performance Series

Medical grade, temperature-controlled solutions to meet the demanding needs of scientific, life science, laboratory, and medical cold storage applications

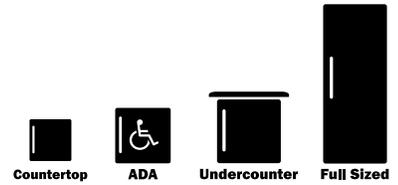

Advanced Temperature Control

- Intelligent microprocessor** digital temperature controller
- Improved temperature accuracy** with a buffered probe in glycol-filled bottle to simulate temperature of stored product
- Additional sensor** reads interior air temperature for superior temperature control
- Adjustable operating control range** from +2°C to +10°C (+35.6°F to +50°F)
- Digital display** of the min/max temperature (updated in 15 minute increments)
- Temperature viewable in Celsius and Fahrenheit** to the nearest tenth of a degree
- Password protection** of control parameters beyond setpoint
- Optimized forced air cooling** for excellent temperature stability and uniformity with rapid recovery after door openings and product loading



Multiple Alarms For Safer Monitoring

- Audible/visual alarms** for high/low temperature excursions
- Open door alarm** sounds if the door is left ajar (default 4 minutes with selectable 1-99 minute range)
- Audible power failure** and sensor failure alarms
- Mute function** for alarms
- Remote alarm** contacts in rear of the unit



Fully Featured Interior For Convenient Storage

- Energy efficient LED lighting** with internal on/off switch
- Adjustable plastic-coated wire shelves** for improved circulation
- Multiple shelf positions** spaced at 1/2" to allow flexible adjusting to support smaller items
- Adjustable cycle defrost** operation
- 1/2" **probe port** included to accept user-provided monitoring equipment



Quality Design For Reliable Performance

- Hospital grade cord** with a green dot plug
- Antimicrobial silver ion-coated handle** for added protection from germs
- Self-closing door** offers added storage protection
- User-reversible door swing** (self-closing function compatible with RHD position only)
- Environmentally-friendly** natural hydrocarbon refrigerant for reduced global warming potential
- Meets EPA and SNAP** requirements
- Convenient security** with a top-mounted door lock (2 keys included)
- Magnetic gaskets** to ensure a positive seal
- Compatible with** Pyxis®, Omnicell® and AcuDose RX®



SKU: ARG3ML



Remote Contacts



Temperature sensor in glycol bottle



Microprocessor digital temperature control



New Options Available

- Keyless Locks
- Interior Lockers
- Ventilated Drawers

See Page 5



Technical Specifications (All Units):

Defrost type: Cycle
Thermostat: Intelligent microprocessor digital
Temperature sensors: 2 (air probe & buffered probe)
Adjustable operating control range: +2°C to +10°C (+35.6°F to +50°F)
Temperature variation: +/- 1°C*
Shelving: Adjustable white plastic coated wire
Voltage: 115V/60 Hz
Cord: NEMA 5-15P
Lock: Factory-installed key lock
Refrigerant: Eco-friendly R600a
Light: LED
Access port: ½"

Door: Reversible
Fan: Internal
Certifications: ETL, ETL-C
Parts & Labor Warranty: 2 years
Compressor warranty: 5 years

Included with units:
 2 keys
 Do Not Unplug removable sticker
 Do Not Adjust Temperature removable sticker
 Do Not Store Personal Items removable sticker
 User manual

DESIGNED TO PROVIDE +/-1°C VARIATION
 The published temperature variation is derived from the maximum deviation of an NTC sensor in a 1 oz. vial located nearest the chamber geometric center during a 24 hour test period.



Extended Warranty
 2-year parts & labor
 5-year compressor



Eco-Friendly
 Uses environmentally friendly hydrocarbons for a greener footprint



Compatible
 with Pyxis®, Omnicell®, & AcuDose RX®



Logging Option
 add our D2LB data logger for additional assurance


	SKU	CAPACITY	H x W x D	DOOR	CABINET	SHELVES	AMPERAGE	SHIPPING WT.
🔒	ARS1ML	1 cu.ft.	21.5" x 17.5" x 19.75"	White	White	3	0.6	70 lbs
🔒	ARG1ML	1 cu.ft.	21.5" x 17.5" x 19.75"	Glass	White	3	0.6	73 lbs
🔒	ARS3ML	3 cu.ft.	34" x 18.5" x 19"	White	White	4	0.6	90 lbs
🔒	ARG3ML	3 cu.ft.	34" x 18.5" x 19"	Glass	White	4	0.6	95 lbs
🔒	ARS6ML	6 cu.ft.	32.5" x 23.38" x 24.38"	White	White	4	0.75	120 lbs
🔒	ARG6ML	6 cu.ft.	32.5" x 23.38" x 24.38"	Glass	White	4	0.75	125 lbs
🔒	ARS8ML	8 cu.ft.	50" x 23.38" x 24.38"	White	White	7	1.4	170 lbs
🔒	ARG8ML	8 cu.ft.	50" x 23.38" x 24.38"	Glass	White	7	1.4	175 lbs
🔒	ARS12ML	12 cu.ft.	61.75" x 23.38" x 24.38"	White	White	7	1.4	185 lbs
🔒	ARG12ML	12 cu.ft.	61.75" x 23.38" x 24.38"	Glass	White	7	1.4	190 lbs
🔒	ARS15ML	15 cu.ft.	72" x 23.38" x 24.38"	White	White	7	1.4	215 lbs
🔒	ARG15ML	15 cu.ft.	72" x 23.38" x 24.38"	Glass	White	7	1.4	215 lbs
🔒	ARS15MLLOCKER	15 cu.ft.	72" x 23.38" x 24.38"	White	White	8 lockers	1.4	250 lbs
🔒	ARG15MLLOCKER	15 cu.ft.	72" x 23.38" x 24.38"	Glass	White	8 lockers	1.4	250 lbs

■ All units can be combined with Accucold freezers using our stacking racks

*Specifications are subject to change without notice. For the most current information, visit accucold.com

MED2 & VAC Medical Freezers

Multiple upright sizes designed to provide improved temperature control and convenient features for **pharmacy, vaccine, medical, biological, laboratory, life science, and industrial storage** applications



Reliable Temperature Storage

Advanced temperature control with digital control panels
NIST calibrated thermometer provides external readout of current and high/low temperature
Buffered temperature probe stored in a glycol-filled bottle
Certificate of NIST calibration included (2-years)



User-Friendly Features

Adjustable shelves or slide-out baskets
Hospital grade cord with 'green dot' plug
Audible high/low temperature alarm for added protection
Access port included for additional monitoring equipment



Advanced Design & Construction

Factory-installed lock for added security as needed
Static cooling with manual defrost operation
Thick insulation and magnetic gaskets to ensure a quality seal



	SKU	CAPACITY	H x W x D	DOOR	CABINET	SHELVES	INSTALLATION	AMPERAGE	SHIPPING WT.	CERTIFICATIONS*
🔒	FS24LMED2	1.4 cu.ft.	21.38" x 18.5" x 17.63"	White	White	1 wire	Freestanding	0.8	42 lbs	ETL, ETL-C
🔒	FS30LMED2	1.8 cu.ft.	24.63" x 18.5" x 17.75"	White	White	2 wire	Freestanding	0.8	53 lbs	ETL, ETL-C
🔒	VT65MLVAC456	3.5 cu.ft.	33.5" x 23.63" x 23.63"	White	White	3 baskets	Built-In/Freestanding	1.3	110 lbs	NSF/ANSI 456
🔒	VT65MLVAC456ADA	3.5 cu.ft.	32" x 23.63" x 23.50"	White	White	3 baskets	Built-In/Freestanding	1.3	110 lbs	NSF/ANSI 456

■ All units can be combined with Accucold refrigerators using our stacking racks

*Specifications are subject to change without notice. For the most current information, visit accucold.com

Stacked Refrigerator-Freezer Combinations

Pharma-Vac refrigerators stacked with MED2 freezers create **all-purpose combinations** that provide reliable storage in slimmer fitting footprints



Features

- Easy assembly** with our stacking rack
- Takes up less than 24"** of floor space for an easier fit in facilities
- Fully featured** with our PV and MED2 packages
- Access ports included** with both units
- External temperature readout** as recommended by the CDC
- Independent refrigerator and freezer operation** for optimum performance
- High/low temperature alarms** installed in both units
- Locking doors** with separate keys
- Extended warranty** with 2 years parts & labor/5 years compressor



StackRack lets you combine virtually any two units



SKU: ARG6PV-AFZ5PVBIADASTACK



SKU: ARS6PV-AFZ5PVBIADASTACK


	SKU	CAPACITY	H x W x D	DOOR	CABINET	SHELVES	AMPERAGE	CERTIFICATIONS
🔒	ARS32PVBIADA-AFZ2PVBIADASTACK	2.83/2.47 cu.ft.	64" x 19.75" x 22.63"	White	White	4/4	.75/1.3	ETL, ETL-C
🔒	ARG31PVBIADA-AFZ2PVBIADASTACK	2.83/2.47 cu.ft.	64" x 19.75" x 22.63"	Glass/White	White	4/4	.75/1.3	ETL, ETL-C
🔒	ARS6PV-AFZ5PVBIADASTACK	6/3.88 cu.ft.	64" x 23.38" x 25"	White	White	4/4	.75/1.3	ETL, ETL-C
🔒	ARG6PV-AFZ5PVBIADASTACK	6/3.88 cu.ft.	64" x 23.38" x 25"	Glass/White	White	4/4	.75/1.3	ETL, ETL-C
🔒	ARS8PV-AFZ1PVBIADASTACK	8/1.5 cu.ft.	72" x 23.38" x 24.38"	White	White	7/1	.75/1.3	ETL, ETL-C
🔒	ARG8PV-AFZ1PVBIADASTACK	8/1.5 cu.ft.	72" x 23.38" x 24.38"	Glass/White	White	7/1	.75/1.3	ETL, ETL-C

* All units can be manufactured with a left hand door swing. Add option "LHD" upon order
■ Additional combinations available by special order

*Specifications are subject to change without notice. For the most current information, visit accucold.com

Ultra Low Temperature Chest Freezers

Made in Denmark, our -85°C chest freezers offer reliable ultra low temperature storage for biological samples, **DNA/RNA material, chemicals, select vaccines**, and other substances with **strict temperature requirements**

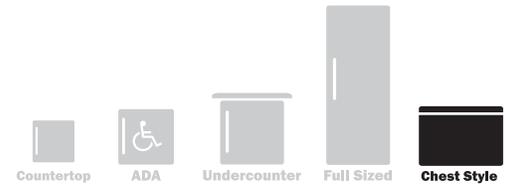

Low Temperature Storage

Digital control panel allows you to manage the temperature between -50 and -85°C
Temperature viewable in Celsius or Fahrenheit to the nearest tenth of a degree
Fast pull-down time of 3 hours from ambient temperature
Power-out alarm powered by a 9V battery audible warns of power failure



User-Friendly Features

Pre-installed casters allow easy mobility
Counterbalanced hinges to ensure safer loading
High/low temperature alarm audible warns if the interior goes out of range
Defrost drain in front for easy maintenance as needed
Vertical box shelf option for added storage convenience



Quality Design For Reliable Performance

Factory-installed lock for convenient security
Inner lids included for added protection when loading the freezer
Hermetically sealed compressor ensures lasting durability in busy facilities
Extra thick insulation with 4 ½" thick walls
Advanced design features 8 layers of D-shaped cooling pipes to improve efficiency




SKU: LAB11R9 includes 6 10-box shelves and 3 5-box shelves

SKU	CAPACITY	H X W X D	FINISH	STORAGE	SET POINT RANGE	CASTORS	AMPERAGE	SHIPPING WT.	CERTIFICATIONS
🔒 LAB11	4.8 cu.ft.	36.25" x 28.5" x 28"	White	-	-85 to -50°C	Pre-Installed	5.3	140 lbs	UL, UL-C, ULS
🔒 LAB11R9	4.8 cu.ft.	36.25" x 28.5" x 28"	White	(6) 10-box shelves (3) 5-box shelves	-85 to -50°C	Pre-Installed	5.3	160 lbs	UL, UL-C, ULS
🔒 LAB8	3.08 cu.ft.	36.25" x 23.75" x 28"	White	-	-85 to -50°C	Included	6	200 lbs	UL, UL-C, ULS
🔒 LAB8R6	3.08 cu.ft.	36.25" x 23.75" x 28"	White	(3) 10-box shelves (3) 5-box shelves	-85 to -50°C	Included	6	210 lbs	UL, UL-C, ULS

Low Temperature Freezers

From laboratory research to veterinary storage, Accucold's **-30°C, -35°C, and -45°C** freezers serve a variety of storage functions in a range of sizes to fit any facility's space

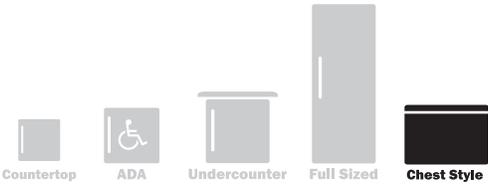

Low Temperature Storage

Digital control panel for easy temperature management
Temperature viewable in Celsius or Fahrenheit to the nearest tenth of a degree
NIST calibrated thermometer with a 2-year calibration certificate included for your records (-30 & -35°C series)



Variety of Sizes & Styles

28" to 91" wide options



User-Friendly Features

Pre-installed casters allow easy mobility (select units)
Counterbalanced hinges to ensure safer loading
High/low temperature alarm audible warns if the interior goes out of range
Defrost drain in front for easy maintenance as needed
Storage baskets included (select units)



Quality Design For Reliable Performance

Factory-installed lock for convenient security
Stainless steel corner protectors provide added protection in busy facilities
Thick insulation to ensure proper cold storage



SKU: EL41LT




SKU: VLT74

SKU	CAPACITY	H x W x D	FINISH	STORAGE	SET POINT RANGE	CASTERS	AMPERAGE	SHIPPING WT.	CERTIFICATIONS
EL11LT	4.8 cu.ft.	33.5" x 28.5" x 27.25"	White	-	-45 to -0°C	Included	7.2	127 lbs	UL, UL-C, UL-S
EL21LT	8.4 cu.ft.	33.5" x 41.5" x 27.25"	White	-	-45 to -0°C	Included	7.2	135 lbs	UL, UL-C, UL-S
EL31LT	11 cu.ft.	33.5" x 51.38" x 27.25"	White	-	-45 to -0°C	Included	7.2	157 lbs	UL, UL-C, UL-S
EL41LT	12.8 cu.ft.	33.5" x 59.25" x 27.25"	White	-	-45 to -0°C	Included	7.2	170 lbs	UL, UL-C, UL-S
EL51LT	15.5 cu.ft.	33.5" x 67" x 27.25"	White	-	-45 to -0°C	Included	7.2	220 lbs	UL, UL-C, UL-S
VLT74	6.7 cu.ft.	33.25" x 37.5" x 22.25"	White/SS	(2) Baskets	-35 to -15°C	Optional	1.4	86 lbs	ETL, ETL-C, ETL-S
VLT104	10 cu.ft.	33.25" x 44" x 25.5"	White/SS	(2) Baskets	-35 to -15°C	Optional	2.47	130 lbs	ETL, ETL-C, ETL-S
VLT850	9 cu.ft.	33" x 45.75" x 24"	White/SS	(1) Basket	-35 to -15°C	Optional	1.4	110 lbs	UL, UL-C, UL-S
VLT134	12.1 cu.ft.	32.75" x 50.25" x 29.25"	White/SS	(2) Baskets	-35 to -15°C	Optional	2.8	140 lbs	ETL, ETL-C, ETL-S
VLT184	17.2 cu.ft.	32.5" x 65.25" x 29.25"	White/SS	(2) Baskets	-35 to -15°C	Included	3.6	175 lbs	ETL, ETL-C, ETL-S
VLT204	19.8 cu.ft.	32.63" x 76" x 28.25"	White/SS	(2) Baskets	-35 to -15°C	Included	3.6	210 lbs	ETL, ETL-C, ETL-S
VLT253	27 cu.ft.	36.75" x 91.25" x 28.25"	White/SS	(2) Baskets	-35 to -15°C	Included	2.3	290 lbs	ETL, ETL-C, ETL-S
VT73	6.7 cu.ft.	33.25" x 37.5" x 22.25"	White/SS	(2) Baskets	-30 to -15°C	Optional	1.4	86 lbs	ETL, ETL-C, ETL-S
VT103	10 cu.ft.	33.25" x 44" x 25.5"	White/SS	(2) Baskets	-30 to -15°C	Optional	2.47	130 lbs	ETL, ETL-C, ETL-S
VT85	9 cu.ft.	33" x 45.75" x 24"	White/SS	(1) Basket	-30 to -15°C	Optional	1.4	110 lbs	UL, UL-C, UL-S
VT133	12.1 cu.ft.	32.75" x 50.25" x 29.25"	White/SS	(2) Baskets	-30 to -15°C	Optional	2.8	140 lbs	ETL, ETL-C, ETL-S
VT183	17.2 cu.ft.	32.5" x 65.25" x 29.25"	White/SS	(2) Baskets	-30 to -15°C	Included	3.6	175 lbs	ETL, ETL-C, ETL-S
VT203	19.8 cu.ft.	32.63" x 76" x 28.25"	White/SS	(2) Baskets	-30 to -15°C	Optional	3.6	210 lbs	ETL, ETL-C, ETL-S
VT252	27 cu.ft.	36.75" x 91.25" x 28.25"	White/SS	(2) Baskets	-30 to -15°C	Included	2.3	290 lbs	ETL, ETL-C, ETL-S

Controlled Room Temperature Performance Series Cabinet

Designed and **purpose-built** for ambient medication and vaccine storage in pharmacy and patient care areas

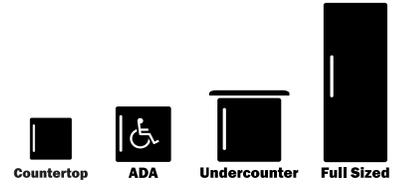

Advanced Temperature Control

- Intelligent microprocessor** digital temperature controller
- Improved temperature accuracy** with a buffered probe in glycol-filled bottle to simulate temperature of stored product
- Additional sensor** reads interior air temperature for superior temperature control
- Adjustable operating control range** from 68° to 77° F (20°C to 25°C)
- Digital display** of the min/max temperature (updated in 15 minute increments)
- Temperature viewable in Celsius and Fahrenheit** to the nearest tenth of a degree
- Password protection** of control parameters beyond setpoint
- Optimized forced air cooling** for excellent temperature stability and uniformity with rapid recovery after door openings and product loading



Multiple Alarms For Safer Monitoring

- Audible/visual alarms** for high/low temperature excursions
- Open door alarm** sounds if the door is left ajar (default 4 minutes with selectable 1-99 minute range)
- Audible power failure** and sensor failure alarms
- Mute function** for alarms
- Remote alarm** contacts in rear of the unit



Fully Featured Interior For Convenient Storage

- Energy efficient LED lighting** with internal on/off switch
- Adjustable plastic-coated wire shelves** for improved circulation
- Multiple shelf positions** spaced at 1/2" to allow flexible adjusting to support smaller items
- Adjustable cycle defrost** operation
- 1/2" probe port** included to accept user-provided monitoring equipment



Quality Design For Reliable Performance

- Hospital grade cord** with a green dot plug
- Antimicrobial sliver ion-coated handle** for added protection from germs
- Self-closing door** offers added storage protection
- User-reversible door swing** (self-closing function compatible with RHD position only)
- Environmentally-friendly** natural hydrocarbon refrigerant for reduced global warming potential
- Meets EPA and SNAP** requirements
- Convenient security** with a top-mounted door lock (2 keys included)
- Magnetic gaskets** to ensure a positive seal
- Compatible with** Pyxis®, Omnicell® and AcuDose RX®



SKU: ARG12PV-CRT



Performance
CRT CONTROLLED ROOM TEMPERATURE 72°F

New Options Available

- Keyless Locks
- Interior Lockers
- Ventilated Drawers

See Page 5



ARS1PV-CRT ARG3PV-CRT ARG8PVDR-CRT ARS12PV-CRT ARG15PV-CRT

Technical Specifications (All Units):

Defrost type: Cycle
Thermostat: Intelligent microprocessor digital
Temperature sensors: 2 (air probe & buffered probe)
Adjustable operating control range: 68° to 77 °F (20 °C to 25 °C)
Temperature variation: +/- 1.5°C*
Shelving: Adjustable white plastic coated wire
Voltage: 115V/60 Hz
Cord: NEMA 5-15P
Lock: Factory-installed key lock
Refrigerant: Eco-friendly R600a or R290a
Light: LED
Access port: ½"

Door: Reversible
Fan: Internal
Certifications: ETL, ETL-C
Parts & Labor Warranty: 2 years
Compressor warranty: 5 years

Included with units:
 2 keys
 Do Not Unplug removable sticker
 Do Not Adjust Temperature removable sticker
 Do Not Store Personal Items removable sticker
 User manual

DESIGNED TO PROVIDE +/-1.5 °C VARIATION
 The published temperature variation is derived from the maximum deviation of an NTC sensor in a 1 oz. vial located nearest the chamber geometric center during a 24 hour test period.



Extended Warranty
 2-year parts & labor
 5-year compressor



Eco-Friendly
 Uses environmentally friendly hydrocarbons for a greener footprint



Compatible
 with Pyxis®, Omnicell®, & AcuDose RX®



Logging Option
 Add our D2LB data logger for additional assurance


	SOLID DOOR SKU	GLASS DOOR SKU	CAPACITY	H x W x D	INSTALLATION	CABINET	SHELVES	AMPERAGE	SHIPPING WT.
🔒	ARS1PV-CRT	ARG1PV-CRT	1 cu.ft.	21.5" x 17.5" x 19.75"	Freestanding	White	3	0.6	70 lbs
🔒	ARS2PV-CRT	ARG2PV-CRT	1.94 cu.ft.	22" x 18.5" x 25"	Freestanding	White	2	0.6	86 lbs
🔒	ARS32PVBIADA-CRT	ARG31PVBIADA-CRT	2.83 cu.ft.	32" x 18.5" x 22.63"	Recessed	White	4	0.6	113 lbs
🔒	ARS3PV-CRT	ARG3PV-CRT	3 cu.ft.	34" x 18.5" x 19"	Freestanding	White	4	0.6	100 lbs
🔒	ARS6PV-CRT	ARG6PV-CRT	6 cu.ft.	32.5" x 23.38" x 24.38"	Freestanding	White	4	0.75	120 lbs
🔒	ARS62PVBIADA-CRT	ARG61PVBIADA-CRT	6 cu.ft.	31.75" x 23.38" x 25"	Recessed	White	4	0.75	125 lbs
🔒	ARS8PV-CRT	ARG8PV-CRT	8 cu.ft.	50" x 23.38" x 24.38"	Freestanding	White	7	1.4	170 lbs
🔒	ARS12PV-CRT	ARG12PV-CRT	12 cu.ft.	61.75" x 23.38" x 24.38"	Freestanding	White	7	1.4	185 lbs
🔒	ARS15PV-CRT	ARG15PV-CRT	15 cu.ft.	72" x 23.38" x 24.38"	Freestanding	White	7	1.4	215 lbs
🔒	ARS18PV-CRT	ARG18PV-CRT	18 cu.ft.	78.5" x 27.5" x 28"	Freestanding	White	7	1.5	295 lbs

■ All units can be combined with Accucold freezers using our stacking racks

*Specifications are subject to change without notice. For the most current information, visit accucold.com

Icemakers & Ice/Water Dispensers

Available in a range of sizes, to keep patients and staff hydrated.

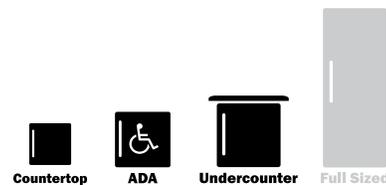

Features

- Tabletop ice/water dispenser** ideal for hospital waiting areas
- Optional filters** for improved ice water purity
- Commercially approved choices** listed to NSF-12 standards
- Drain-free choice (BIM25)** for versatile installation
- Choices available in a lower 32" height** for use under ADA compliant counters
- ENERGY STAR certified** choices included
- High capacity production** on select models
- Available with** an internal pump or gravity drain system



SKU: AIWD160

SKU: AIWD282

SKU: AIWD450

Ice & Water Dispensers

SKU	CAPACITY	ICE TYPE	H x W x D	FILTER	CABINET	AMPERAGE	SHIPPING WT.	CERTIFICATIONS
AIWD160	160 lbs/day	Clear nugget	24.75" x 13.75" x 24"	Optional	Black/SS	2.8	112 lbs	UL,UL-C,ETL-S
AIWD282	282 lbs/day	Clear nugget	28" x 16.5" x 24.88"	Optional	SS/SS Look	5.8	177 lbs	UL,UL-C,ETL-S
AIWD450	378 lbs/day	Clear nugget	43.5" x 16.5" x 26.5"	Optional	SS/SS Look	15	223 lbs	UL,UL-C,ETL-S

*For versions of the above with filters, add suffix "FLTR"


Clear Icemakers (Drain Required)

SKU	CAPACITY	ICE TYPE	H x W x D	DOOR	CABINET	AMPERAGE	SHIPPING WT.	CERTIFICATIONS
BIM44G	50 lbs/day	Clear cube	33" x 14.5" x 23.5"	Stainless Steel	Black	4.8	105 lbs	UL, UL-C, NSF
BIM44GADA	50 lbs/day	Clear cube	32.38" x 14.5" x 23.5"	Stainless Steel	Black	4.8	105 lbs	UL, UL-C, NSF
BIM100	100 lbs/day	Clear cube	34.5" x 20.5" x 22.25"	Black	Stainless Steel	3.8	120 lbs	ETL, ETL-C, ETL-S
BIM100ADA	100 lbs/day	Clear cube	31.5" x 20.5" x 22.25"	Black	Stainless Steel	3.8	120 lbs	ETL, ETL-C, ETL-S

*Specifications are subject to change without notice. For the most current information, visit accucold.com

JCAHO Compliant Nutrition Centers

Commercially approved refrigerators and freezers specifically designed for the storage of sealed food and beverages in a variety of facilities including break rooms, waiting areas, nurses' stations, and more

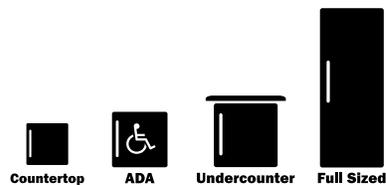

Features

- Factory-installed NIST calibrated thermometer with continuous display
- 2-year certificate of calibration included for your records
- Commercially approved to NSF-7 standards
- Audible high/low temperature alarms
- Factory-installed keyed locks
- Adjustable shelving for easier storage
- Matching refrigerator and freezer sets available
- Range of sizes including countertop, undercounter, ADA compliant, and full capacity



SKU: SCR215LNZ



SKU: FF31L7NZ



SKU: SCR600BGLBINZ



SKU: FFAR121SSNZ

Refrigerators

SKU	CAPACITY	H x W x D	DOOR	CABINET	SHELVES	INSTALLATION	AMPERAGE	SHIPPING WT.	CERTIFICATIONS
FFAR25L7NZ	1.7 cu.ft.	22.75" x 17" x 19.13"	White	White	2	Freestanding	1.3	60 lbs	ETL, ETL-C, ETL-S
SCR215LNZ	1.7 cu.ft.	22.75" x 17" x 18.75"	Glass	White	2	Freestanding	1.3	60 lbs	ETL, ETL-C, ETL-S
FF6LWBI7NZ	5.5 cu.ft.	33.5" x 23.63" x 23.5"	White	White	3	Built-in/Freestanding	1.3	110 lbs	ETL, ETL-C, ETL-S
FF6LWBI7NZADA	5.5 cu.ft.	32" x 23.63" x 23.5"	White	White	3	Built-in/Freestanding	1.3	110 lbs	ETL, ETL-C, ETL-S
SCR600GLBINZ	5.5 cu.ft.	33.5" x 23.63" x 23.5"	Glass	White	4	Built-in/Freestanding	1.8	122 lbs	UL, UL-C, ETL-S
SCR600GLBINZADA	5.5 cu.ft.	32" x 23.63" x 23.5"	Glass	White	4	Built-in/Freestanding	1.8	122 lbs	UL, UL-C, ETL-S
FFAR12WNZ	10.1 cu.ft.	60.88" x 23.63" x 22.75"	White	White	4	Freestanding	1.7	155 lbs	ETL, ETL-C, ETL-S
FFAR121SSNZ	10.1 cu.ft.	60.88" x 23.63" x 22.75"	Stainless Steel	Stainless Steel	4	Freestanding	1.7	155 lbs	ETL, ETL-C, ETL-S

Freezers

SKU	CAPACITY	H x W x D	DOOR	CABINET	SHELVES	INSTALLATION	AMPERAGE	SHIPPING WT.	CERTIFICATIONS
SCFU386NZ	2 cu.ft.	26.25" x 23.38" x 20.63"	Glass	Gray	2	Freestanding	4	95 lbs	ETL, ETL-C, ETL-S

*Specifications are subject to change without notice. For the most current information, visit accucold.com

Break Room Refrigerator-Freezers

Variety of choices equipped with NIST calibrated thermometers that provide a continuous digital display of the current and high/low temperature



Features

- Factory-installed NIST calibrated thermometer**
- 2-year certificate of calibration** included for your records
- Audible high/low temperature alarm**
- Digital temperature readout** for each section (refrigerator only for undercounter choices)
- Frost-free operation** in full-sized units
- Adjustable shelving** and door storage
- Interior lighting** in the fresh food compartment
- User-reversible door swing** to best accommodate any setting



SKU: BKRF663B



SKU: BKRF661



SKU: BKRF14SS



SKU: BKRF21W

SKU	CAPACITY	H x W x D	DOOR	CABINET	SHELVES	INSTALLATION	AMPERAGE	SHIPPING WT.	CERTIFICATIONS
BKRF661	5.1 cu.ft	32.63" x 23.63" x 23"	White	White	3 glass	Freestanding	1.3	110 lbs	UL, UL-C
BKRF661BIADA	5.1 cu.ft	32" x 23.63" x 23"	White	White	3 glass	Built-in/Freestanding	1.3	110 lbs	UL, UL-C
BKRF663B	5.1 cu.ft	32.63" x 23.63" x 23"	Black	Black	3 glass	Freestanding	1.3	110 lbs	UL, UL-C
BKRF663BBIADA	5.1 cu.ft	32" x 23.63" x 23"	Black	Black	3 glass	Built-in/Freestanding	1.3	110 lbs	UL, UL-C
BKRF1119BL	10.3 cu.ft	60.63" x 23.63" x 26"	Black	Black	3 wire	Freestanding	1.6	105 lbs	UL, UL-C
BKRF14W	12.9 cu.ft.	71.38" x 26" x 26.25"	White	White	2 glass	Freestanding	1.3	187 lbs	UL, UL-C
BKRF14SS	12.9 cu.ft.	71.38" x 26" x 26.25"	Stainless Steel	Black	2 glass	Freestanding	1.3	187 lbs	UL, UL-C
BKRF18W	18 cu.ft.	68" x 29.5" x 31.25"	White	White	2 glass	Freestanding	1.1	200 lbs	UL, UL-C
BKRF18PL	18 cu.ft.	68" x 29.5" x 31.25"	Stainless Look	Gray	2 glass	Freestanding	1.1	200 lbs	UL, UL-C
BKRF21W	20.4 cu.ft	70.5" x 29.63" x 31.75"	White	White	4 wire	Freestanding	6	230 lbs	CSA
BKRF21B	20.4 cu.ft	70.5" x 29.63" x 31.75"	Black	Black	4 wire	Freestanding	6	230 lbs	CSA

*Most units can be ordered with combination or key locks

*Specifications are subject to change without notice. For the most current information, visit accucold.com

Compact & Mid-Sized Microwaves

Commercially approved units and basic countertop microwaves for a variety of heating applications



Features

- Black, white, or stainless steel** finish options
- Commercially approved** choices listed to NSF-4 standards
- 115V operation** to work with standard outlets
- Digital control** pads for easy use
- Savable settings** for faster one-touch cooking
- Can be ordered pre-mounted** to virtually any Accucold or Summit refrigerator
- USB ports** on select items
- Refrigerator-Microwave** combinations available



SKU: SCM1000SS



SKU: SCM902BL



SKU: MRF34BSSA

Microwaves

SKU	CAPACITY	H x W x D	FINISH	AMPERAGE	SHIPPING WT.	WATTAGE	SPECIALTY FEATURES	CERTIFICATIONS
SCM853	.7 cu.ft.	11" x 18.88" x 14.25"	Stainless Steel	12	32 lbs	900W	-	UL, UL-C
SM901WH	.7 cu.ft.	10.25" x 17.75" x 13"	White	15	37 lbs	700W	-	UL, UL-C
SM902BL	.7 cu.ft.	10.25" x 17.75" x 13"	Black	15	37 lbs	700W	-	UL, UL-C
SM903BSA	.7 cu.ft.	10.38" x 17.88" x 12.13"	Black/SS Handle	15	37 lbs	700W	Power allocator + (2) USB ports	UL, UL-C
SM1102WH	1 cu.ft.	11.75" x 21.13" x 15.5"	White	20	37 lbs	1000W	-	UL, UL-C
SCM1000SS	.9 cu.ft.	12.25" x 20.25" x 14.75"	Stainless Steel	20	41 lbs	1000W	Commercially Listed	UL, UL-C, ETL-S

Microwave-Refrigerator Combinations

SKU	H X W X D	REFRIGERATOR TYPE	REFRIGERATOR CAPACITY	FINISH	SHIPPING WT	CERTIFICATIONS
MRF66BKA	43.63"x 23.63" x 23.5"	Refrigerator w/Interior Freezer	5.1 cu.ft.	Black	150 lbs	UL, UL-C
MRF34BSSA	43.38" x 19" x 19.75"	2-Door Refrigerator-Freezer	3.2 cu.ft.	SS/Black	120 lbs	UL, UL-C
MRF73PLA	54.38" x 18.5" x 19.13"	2-Door Refrigerator-Freezer	4.5 cu.ft.	SS Look/Black	155 lbs	CSA, CSA-C

MOMCUBE® Series Breast Milk Refrigeration

All-refrigerators specially designed for the unique needs of breast milk, with interior locking compartments to allow nursing mothers private storage



Purpose-Built for Breast Milk Storage

- Designed to operate between 33 and 40°F** for the proper storage of human milk
- Individual locking compartments** for secure, separate storage for ("LK" Series)
- Combination locks** allow each mother her own access system
- Single key override** included for staff to manage as needed
- Audible/visual alarms** for high/low temperature excursions
- Open door alarm** offers added assurance in office or hospital settings



Advanced Temperature Performance

- Intelligent microprocessor** digital temperature controller
- Improved accuracy** with a buffered probe in glycol-filled bottle to simulate temperature of stored bottles
- Additional sensor** reads interior air temperature for superior temperature control
- Digital display** of the min/max temperature (updated in 15 minute increments)
- Password protection** of control parameters beyond setpoint
- Optimized forced air cooling** for excellent temperature stability



Fully Featured Interior For Convenient Storage

- Energy efficient LED lighting** with internal on/off switch
- 1/2" probe port** included to accept user-provided monitoring equipment



Quality Design For Reliable Performance

- Hospital grade cord** with a green dot plug
- Antimicrobial silver ion-coated handle** for added protection from germs
- Self-closing door** offers added storage protection
- Environmentally friendly** natural hydrocarbon refrigerant for reduced global warming potential
- Meets EPA and SNAP requirements**
- Convenient security** with a top-mounted front door lock (2 keys included)
- Powerful magnetic** door gaskets to ensure a tight seal for energy savings and improved performance



SKU: ARS8MLMCLK

MOMCUBE Freezers:

Provide additional solutions for longer term storage. These units come with a more basic featured package.



Interior locking compartments allow private storage



Designed to maintain recommended temperature for breast milk storage



Technical Specifications (Refrigerators*):

Defrost type: Cycle
Thermostat: Intelligent microprocessor digital
Temperature sensors: 2 (air probe & buffered probe)
Adjustable operating control range: 33 to 40°F
Temperature variation: +/-1.8°F*
Shelving: Interior locking compartments or adjustable white plastic coated wire
Voltage: 115V/60Hz
Cord: NEMA 5-15P
Lock: Factory-installed key lock + individual combination locks with single key override ("LK" Series)
Refrigerant: Eco-friendly R600a
Light: LED

Access Port: 1/2"
Door: Reversible
Fan: Internal
Certifications: ETL, ETL-C
Parts & Labor Warranty: 2 years
Compressor Warranty: 5 years

Included with units:
 2 keys for outer door
 2 keys to override combination locks
 User manual

DESIGNED TO PROVIDE +/-1.8°F VARIATION
 The published temperature variation is derived from the maximum deviation of an NTC sensor in a 1 oz. vial located nearest the chamber geometric center during a 24 hour test period.

100% GUARANTEE
Extended Warranty
 2-year parts & labor
 5-year compressor

Eco-Friendly
 Uses environmentally friendly hydrocarbons for a greener footprint

Logging Option
 Add our D2LB data logger for additional assurance

LOCKERS
 Individual storage compartments with combination locks

Refrigerators

SKU	CAPACITY	H x W x D	INSTALLATION	DOOR	CABINET	INTERIOR	AMPERAGE	SHIPPING WT.
ARS1MLMC	1 cu.ft.	21.5" x 17.5" x 19.75"	Freestanding	White	White	2 shelves	0.6	70 lbs
ARS2MLMC	1.94 cu.ft.	22" x 18.5" x 25"	Freestanding	White	White	2 shelves	0.6	86 lbs.
ARS3MLMC	3 cu.ft.	34" x 18.5" x 19"	Freestanding	White	White	4 shelves	0.6	90 lbs
ARS32MLMCBIADA	2.83 cu.ft.	32" x 23.38" x 22.63"	Recessed	White	White	4 shelves	0.6	113 lbs
ARS6MLMC	6 cu.ft.	32.5" x 23.38" x 24.63"	Freestanding	White	White	4 shelves	0.75	120 lbs
ARS6MLMCLK	6 cu.ft.	32.5" x 23.38" x 24.63"	Freestanding	White	White	2 locking compartments	0.75	150 lbs
ARS62MLMCBIADA	6 cu.ft.	32" x 23.38" x 25"	Recessed	White	White	4 shelves	0.75	150 lbs
ARS62MLMCBIADADLK	6 cu.ft.	32" x 23.38" x 25"	Recessed	White	White	2 locking compartments	0.75	150 lbs
ARS8MLMC	8 cu.ft.	50" x 23.38" x 24.38"	Freestanding	White	White	7 shelves	1.4	170 lbs
ARS8MLMCLK	8 cu.ft.	50" x 23.38" x 24.38"	Freestanding	White	White	2 locking compartments	1.4	210 lbs
ARS12MLMC	12 cu.ft.	61.75" x 23.38" x 24.38"	Freestanding	White	White	7 shelves	1.4	185 lbs
ARS12MLMCLK	12 cu.ft.	61.75" x 23.38" x 24.38"	Freestanding	White	White	6 locking compartments	1.4	230 lbs
ARS15MLMC	15 cu.ft.	72" x 23.38" x 24.38"	Freestanding	White	White	7 shelves	1.4	215 lbs
ARS15MLMCLK	15 cu.ft.	72" x 23.38" x 24.38"	Freestanding	White	White	8 locking compartments	1.4	300 lbs

Freezers


SKU	CAPACITY	H x W x D	INSTALLATION	DOOR	CABINET	INTERIOR	AMPERAGE	SHIPPING WT.
AFZ1PVMC	1.5 cu.ft.	22" x 18.5" x 25"	Freestanding	White	White	1 shelf	1.3	86 lbs.
AFZ2PVBIADAMC	2.47 cu.ft.	32" x 19.75" x 22.63"	Recessed	White	White	4 shelves	1.3	110 lbs.
AFZ5PVBIADAMC	3.88 cu.ft.	31.75" x 23.38" x 25"	Recessed	White	White	4 shelves	1.3	165 lbs.

Portable Refrigerator/Freezer

SKU	CAPACITY	H x W x D	FINISH	POWER	TEMPERATURE RANGE	SHIPPING WEIGHT	SHIPPING WT.
SPRF11MC	.35 cu.ft.	11.25" x 14" x 16.13"	White	12/24V DC/115V	-20 to +8°C	17 lbs.	37 lbs

PURETHERM Blanket Warmers

Designed and constructed in the USA to keep towels, blankets, and other linens properly warmed in hospitals, clinics, spas, and other facilities



Features

Passive heating system (PTHC series) to minimize lint build up for safe, effective operation

Stainless steel or hammered aluminum interior for easy cleaning

Double pane tempered glass door provides a full view of blanket inventory

Digital thermostats ensure intuitive temperature management

Large LED readout of the temperature

Operates between 90 and 140°F

Factory-installed lock with two keys included

Silent operation (PTHC series) with no moving parts

Automatic turnoff prevents overheating

Flush design with a sealed back

Optional dollies available for easier mobility

Fully assembled in the USA



Stainless steel construction for lasting durability



SKU: PTHC65G



SKU: PTHC155G

SKU	CAPACITY	H x W x D	DOOR	CABINET	DOOR SWING	AMPERAGE	SHIPPING WT.	CERTIFICATIONS
PHC51G	2 cu.ft.	29.5" x 23.38" x 19.88"	Glass	Gray	RHD	5.5	145 lbs	ETL, ETL-C
PTHC65G	4.57 cu.ft.	36" x 23.63" x 23.5"	Glass	Stainless Steel	RHD	5.5	145 lbs	ETL, ETL-C
PTHC65GLHD	4.57 cu.ft.	36" x 23.63" x 23.5"	Glass	Stainless Steel	LHD	5.5	145 lbs	ETL, ETL-C
PTHC125G	10.57 cu.ft.	60" x 23.63" x 23.75"	Glass	Stainless Steel	RHD	5.5	175 lbs	ETL, ETL-C
PTHC155G	12.17 cu.ft.	71.5" x 23.63" x 23.75"	Glass	Black	RHD	5.5	200 lbs	ETL, ETL-C
PTHC155GLHD	12.17 cu.ft.	71.5" x 23.63" x 23.75"	Glass	Black	LHD	5.5	200 lbs	ETL, ETL-C
PTHC155GCSS	12.17 cu.ft.	71.5" x 23.63" x 23.75"	Glass	Stainless Steel	RHD	5.5	215 lbs	ETL, ETL-C
PTHC155GCSSLHD	12.17 cu.ft.	71.5" x 23.63" x 23.75"	Glass	Stainless Steel	LHD	5.5	215 lbs	ETL, ETL-C

*Specifications are subject to change without notice. For the most current information, visit accucold.com

Portable Refrigerator/Freezers

Ensure proper cold chain management with mobile refrigeration designed for easy travel and reliable storage



Features

- Includes a **12V power cord** to connect to vehicle sockets
- 110V AC/DC power adapter** included for alternate use
- Factory-installed casters** for smooth mobility (most models)
- Flexible strap handle or trolley** allows easy steering
- Digital control panel** ensures easy operation
- Compressor-based cooling system** for more stability
- Refrigerator or freezer** temperature options



SKU: SPRF86M2



SKU: SPRF26M



SKU: SPRF11

Refrigerator/Freezers


SKU	CAPACITY	H x W x D	FINISH	PORTABLE FEATURES	POWER	TEMPERATURE RANGE	SHIPPING WEIGHT (LBS)
SPRF11	.35 cu.ft.	11.25" x 14" x 16.13"	White	Handles	12/24V DC/115V	-20 to 8°C	17 lbs
SPRF26	.88 cu.ft.	17" x 21.25" x 14.25"	Gray	Handles	12/24V DC/115V	-20 to 8°C	30 lbs
🔒 SPRF26M	.88 cu.ft.	17" x 21.25" x 14.25"	Gray	Collapsible trolley	12/24V DC/115V	-15 to 8°C	32 lbs
🔒 SPRF36M2	1.06 cu.ft.	24.25" x 21.63" x 14.75"	Gray	Factory-installed casters w/handle	12/24V DC/115V	-15 to 8°C	50 lbs
🔒 SPRF86M2	2.8 cu.ft.	25.88" x 22" x 17.5"	Gray	Factory-installed casters w/handle	12/24V DC/115V	-12 to 8°C	70 lbs

Freezers

SKU	CAPACITY	H x W x D	FINISH	PORTABLE FEATURES	POWER	TEMPERATURE RANGE	SHIPPING WEIGHT (LBS)
SPFZ25	.88 cu.ft.	17" x 21.25" x 14.25"	Blue	Handles	12/24V DC/115V	-30 to -20°C	30 lbs
🔒 SPFZ25M	.88 cu.ft.	17" x 21.25" x 14.25"	Blue	Collapsible trolley	12/24V DC/115V	-30 to -20°C	32 lbs

General Purpose Refrigerators and Freezers

Wide selection of general purpose options ideal for non-critical storage (ice packs, cold packs) in a variety of application including nursing stations, waiting rooms, recovery areas, and more

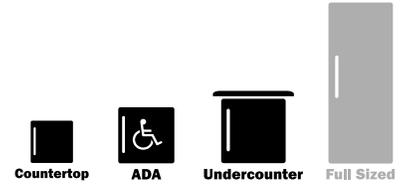

Features

- Factory-installed front locks** for keyed security (Most Units)
- 32" high choices** for use under lower ADA compliant counters
- Commercially listed choices** to meet NSF-7 and JCAHO guidelines
- Glass and solid door models** in a variety of styles
- Temperature readouts** included on many models
- Matching** refrigerator and freezer sets
- Customizable** to meet your exact specifications



SKU: FFAR23LGP



SKU: ADA305AF



SKU: ACR46GL



SKU: ACFF33L



SKU: AGP96RF

All-Refrigerators

SKU	CAPACITY	H x W x D	DOOR	CABINET	SHELVES	INSTALLATION	AMPERAGE	SHIPPING WT.	CERTIFICATIONS
FFAR23LGP	1.7 cu.ft.	20.75" x 18.75" x 17.5"	White	White	1 Wire	Countertop	1	40 lbs	ETL, ETL-C
FF28LWHGP	2.4 cu.ft.	24.88" x 18.5" x 17.75"	White	White	1 Wire	Countertop	1.3	38 lbs	ETL, ETL-C
ADA404REF	3.53 cu.ft.	32" x 19.75" x 22.5"	White	White	3 Wire	Built-in/Freestanding	1.1	70 lbs	ETL, ETL-C, ETL-S
SCR600GLBIADAGP	5.5 cu.ft.	32.38" x 23.63" x 23.5"	Glass	White	4 Glass	Built-in/Freestanding	1.8	105 lbs	UL, UL-C, ETL-S
FF7LWBIADAGP	5.5 cu.ft.	32.25" x 23.63" x 23.5"	White	White	3 Wire	Built-in/Freestanding	1.4	105 lbs	UL, UL-C, ETL-S
ACR46GL	2.65 cu.ft.	31.5" x 19.5" x 22.75"	Glass	White	3 wire	Built-In/Freestanding	1	89	ETL,ETL-C,ETL-S
ACR45L	2.65 cu.ft.	31.5" x 19.5" x 22.75"	White	White	3 wire	Built-In/Freestanding	1	89	ETL,ETL-C,ETL-S

All Freezers


SKU	CAPACITY	H x W x D	DOOR	CABINET	SHELVES	INSTALLATION	AMPERAGE	SHIPPING WT.	CERTIFICATIONS
FS24LGP	1.4 cu.ft.	20" x 18.5" x 17.63"	White	White	1 Wire	Countertop	0.8	40 lbs	ETL, ETL-C
FS30LGP	1.8 cu.ft.	24.63" x 18.5" x 17.75"	White	White	2 Wire	Countertop	0.8	45 lbs	ETL, ETL-C
F407LW	2.8 cu.ft.	34" x 19.25" x 21.38"	White	White	4 baskets	Freestanding	1.6	80 lbs	ETL, ETL-C
ADA305AF	2.47 cu.ft.	32" x 19.75" x 22.5"	White	White	3 pull-out baskets	Built-in/Freestanding	0.6	70 lbs	ETL, ETL-C, ETL-S
ACRR33L	2.65 cu.ft.	31.5" x 19.5" x 22.75"	White	White	3 Wire	Built-In/Freestanding	2	89	ETL,ETL-C,ETL-S
VT65MLGP	3.5 cu.ft.	33.5" x 23.63" x 23.5"	White	White	3 Drawers	Freestanding	1.3	110 lbs	ETL, ETL-C
VT65MLBIADAGP	3.5 cu.ft.	32.25" x 23.63" x 23.5"	White	White	4 Drawers	Freestanding	1.3	110 lbs	UL, UL-C

Refrigerator-Freezers

SKU	CAPACITY	H x W x D	DOOR	CABINET	SHELVES	INSTALLATION	AMPERAGE	SHIPPING WT.	CERTIFICATIONS
ADA302RFZ	2.68 cu.ft.	32" x 19.75" x 22.5"	White	White	3 Glass	Built-in/Freestanding	1.1	70 lbs	ETL, ETL-C
AGP34RF	3.2 cu.ft.	33.38" x 19" x 19.75"	White	White	2 wire	Freestanding	1.1	65 lbs	ETL, ETL-C
AGP96RF	7.1 cu.ft.	59" x 21.5" x 21.75"	White	White	2 wire	Freestanding	0.54	110 lbs	ETL, ETL-C

General Purpose Refrigerators & Freezers

Variety of larger capacity storage solutions for general purpose applications, including TAA compliant options with glass or solid doors

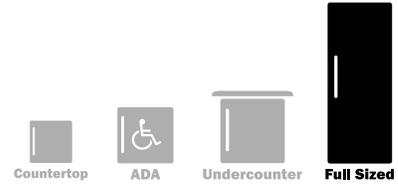

Features

- Large capacity choices** up to 54 cu.ft.
- Slim-fitting choices** in easy-fitting footprints
- TAA compliant options** made in North America
- Glass and solid door models** in a variety of sizes
- Matching** refrigerator and freezer sets
- Customizable** to meet your exact specifications



All-Refrigerators

SKU	CAPACITY	H x W x D	DOOR	CABINET	SHELVES	DOOR SWING	AMPERAGE	SHIPPING WT.	CERTIFICATIONS
ACR82L	7.56 cu.ft.	61.25" x 21" x 21.88"	Glass	White	(3) Wire	RHD	2.5	240 lbs	UL, UL-C, UL-S
🔒 ACR1415RH	14 cu.ft.	66.75" x 23.63" x 24.25"	Glass	SS	(4) Wire	RHD	2.5	240 lbs	ETL, ETL-C
🔒 ACR1415LH	14 cu.ft.	66.75" x 23.63" x 24.25"	Glass	SS	(4) Wire	LHD	2.5	240 lbs	ETL, ETL-C
🔒 FFAR12W	10.1 cu.ft.	58.38" x 23.63" x 22.75"	White	White	(4) Chrome	Reversible	1.7	160 lbs	ETL, ETL-C, ETL-S
🔒 FFAR121SS	10.1 cu.ft.	58.38" x 23.63" x 22.75"	SS	SS	(4) Chrome	Reversible	1.7	160 lbs	ETL, ETL-C, ETL-S
🔒 ACR1818	16.26 cu.ft.	78" x 29.88" x 25.75"	Glass	White	(3) Wire	Reversible	2.2	250 lbs	UL, UL-C, UL-S
🔒 ACR1718RH	17 cu.ft.	79.75" x 27.63" x 24.75"	Glass	SS	(6) Wire	RHD	2.33	268 lbs	ETL, ETL-C
🔒 ACR1718LH	17 cu.ft.	79.75" x 27.63" x 24.75"	Glass	SS	(6) Wire	LHD	2.33	268 lbs	ETL, ETL-C
🔒 ACR261	21.34 cu.ft.	81.75" x 29.88" x 29.63"	Glass	White	(4) Wire	Reversible	3.2	300 lbs	UL, UL-C, UL-S
🔒 ACR261LH	21.34 cu.ft.	81.75" x 29.88" x 29.63"	Glass	White	(4) Wire	LHD	3.2	300 lbs	UL, UL-C, UL-S
FFUR19	17 cu.ft.	67" x 32.75" x 30.25"	White	White	(4) Wire	RHD	1.8	245 lbs	ETL, ETL-C
FFUR23	21 cu.ft.	79.75" x 32.75" x 30.25"	White	White	(4) Wire	RHD	1.8	265 lbs	ETL, ETL-C
🔒 ACRR432L	38.61 cu.ft.	81.5" x 54.25" x 29.75"	SS	SS	(8) Wire	French	6.4	450 lbs	UL, UL-C, UL-S

All-Freezers

SKU	CAPACITY	H x W x D	DOOR	CABINET	SHELVES	DOOR SWING	AMPERAGE	SHIPPING WT.	CERTIFICATIONS
🔒 AFG26MLRH	21.34 cu.ft.	81.75" x 29.88" x 29.63"	Glass	White	Frost-Free	RHD	5.9	300 lbs	UL, UL-C, UL-S
🔒 AFG26MLLH	21.34 cu.ft.	81.75" x 29.88" x 29.63"	Glass	White	Frost-Free	LHD	5.9	300 lbs	UL, UL-C, UL-S
UF18W	17 cu.ft.	64" x 32.75" x 29.25"	White	White	Frost-Free	RHD	1.8	218 lbs	CSA, CSA-C
UF21W	21 cu.ft.	74.38" x 32.5" x 29.5"	White	White	Frost-Free	RHD	1.8	227 lbs	CSA, CSA-C
🔒 UFM19W	18.3 cu.ft.	70.75" x 30.5" x 27"	White	White	Manual	Reversible	2.7	215 lbs	ETL, ETL-C, ETL-S
FFUF194	17 cu.ft.	67" x 32.75" x 30.25"	White	White	Frost-Free	RHD	1.8	245 lbs	ETL, ETL-C
FFUF234	21 cu.ft.	79.75" x 32.75" x 30.25"	White	White	Frost-Free	RHD	1.8	265 lbs	ETL, ETL-C
ACFF436L	38.54 cu.ft.	81.5" x 54.25" x 29.75"	SS	SS	Frost-Free	French	4.5	450 lbs	UL, UL-C, UL-S

Refrigerator-Freezers

SKU	CAPACITY	H x W x D	DOOR	CABINET	SHELVES	DOOR SWING	AMPERAGE	SHIPPING WT.	CERTIFICATIONS
🔒 CTR18LLF2	18 cu.ft.	66.63" x 29.5" x 31.25"	White	White	(2) Glass	Reversible	1.1	200 lbs	UL, UL-C
🔒 CTR21LLF2	21 cu.ft.	66.63" x 29.5" x 32.88"	White	White	(2) Glass	Reversible	1.1	250 lbs	UL, UL-C

Product Options & Accessories

Virtually all Accucold refrigerators and freezers can be configured to meet the unique needs of any office, laboratory, clinic, hospital, pharmacy, or other institution.

NIST Calibrated Temperature Monitoring

Our ISO/IEC 17025:2017 certified laboratory allows us to calibrate temperature monitoring equipment to NIST standards in our own facilities, ensuring accurate temperature readings for your records.



OPTION: DL2BKIT



OPTION: DLSA11CAL-24P

USB Digital Data Logger

Available installed on your equipment or for aftermarket use, the DL2B DDL with alarm provides virtually unlimited logging memory to record unit temperature to your user-set logging intervals. To help support meeting CDC/VFC guidelines, this logger also keeps the current and high/low temperature in view

Portable Loggers

Available in 12 or 24 packs, the DLSA loggers are ideal for cold chain management during the transportation process, with an integrated USB to ensure easy record keeping with downloadable software



OPTION: STO

Step-To-Open Door Pedal

Factory-installed on select refrigerators and freezers, allowing staff to open a unit's door with a light step



LockBoxWKit

Security Lock Box

Interior compartments with dial combination locks to provide an added level of security. Key override included

Additional Options:



OPTION: DR

Interior Options


- Full-extension ventilated drawers**
- Locking compartments** for individual access
- Access ports** with dry contacts
- 3/8" or 1/2" probe holes**



OPTION: STACKING RACK

Exterior Options

- Temperature alarms** with external readouts
- Self-closing door swings**
- Dollies or NSF-listed 3"/6" locking casters**
- Hospital grade cord** with 'green dot' plugs
- Stainless steel exterior** finishing
- Fan-assist options** for compact units
- Stacking racks** to combine units

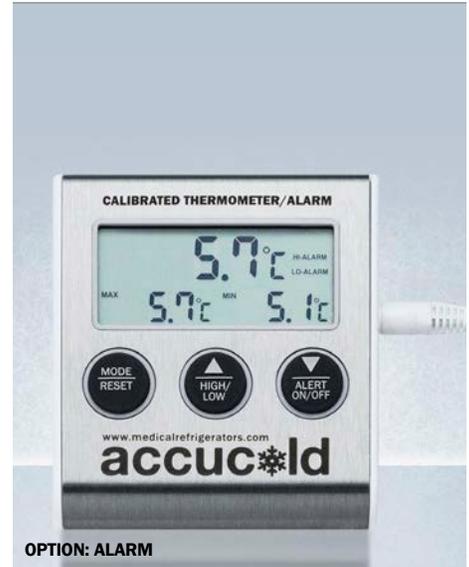

OPTION: ALARM

Additional Services

- Temperature displays** in °F or °C
- Door reversals**
- Pyxis-ready doors**



OPTION: PF1KIT

Audible Alarms

- Power-out alarms**
- High/low temperature alarms**
- Open door alarms**



OPTION: KAL

Locking Options

- Keyless Access Lock**
- Battery or AC powered keypad locks**
- Combination lock** with key override



All NIST calibrated equipment

can be re-calibrated after its certification expires by sending the device or probe to our ISO/IEC 17025:2015 certified laboratory

Additional options are available

Contact our product specialists for more information on how we can customize any unit to your facility's precise storage needs

CDC Vaccine Storage Guidelines

Excerpts from the Vaccine Storage and Handling Toolkit
Updated January 2023



NIST Calibrated Temperature Monitoring

- ✓ **CDC recommends this as a minimal action to protect your vaccine supply**

Vaccine Storage Units: Refrigerator and Freezer Recommendations

There are several types of vaccine storage units available. Purpose-built units are specifically designed to store vaccines.

- ✓ **Use purpose-built or pharmaceutical-grade units designed to either refrigerate or freeze.** These units can be compact, under-the-counter style or large. Purpose-built units, sometimes referred to as “pharmaceutical-grade,” are designed specifically for storage of biologics, including vaccines.

These units often have:

- Microprocessor-based temperature control with a digital temperature sensor (thermocouple, resistance temperature detector [RTD], or thermistor)
- Fan-forced air circulation with powerful fans or multiple cool air vents promoting uniform temperature and fast temperature recovery from an out-of-range temperature.

Temperature Ranges

Refrigerators should maintain temperatures between 2 °C and 8 °C (36 °F and 46 °F)*. Freezers should maintain temperatures between -50 °C and -15 °C (-58 °F and +5 °F). Ultra-cold freezers should maintain temperatures between -90 °C and -60 °C (-130 °F and -76 °F). Refrigerator or freezer thermostats should be set at the factory-set or midpoint temperature, which will decrease the likelihood of temperature excursions.

Temperature Monitoring Device (TMD)

Every vaccine storage unit must have a TMD. An accurate temperature history that reflects actual vaccine temperatures is critical for protecting your vaccines. Investing in a reliable device is less expensive than replacing vaccines wasted due to the loss of potency that comes from storage at out-of-range temperatures.

- ✓ **CDC recommends a specific type of TMD called a “digital data logger” (DDL).**

A DDL provides the most accurate storage unit temperature information, including details on how long a unit has been operating outside the recommended temperature range (referred to as a “temperature excursion”). Unlike a simple minimum/maximum thermometer, which only shows the coldest and warmest temperatures reached in a unit, a DDL provides detailed information on all temperatures recorded at preset intervals.

* For more information, download the Toolkit at [cdc.gov](https://www.cdc.gov).



CDC Best Practice – CDC recommends best practices as additional actions, practices, and procedures to enhance protection of your vaccine supply.

Precise - Stable - Efficient - Whisper Quiet

Accucold is proud to lead the industry with the largest line of cold storage product sizes certified to the NSF/ANSI 456 Vaccine Storage Standard



PHARMA-VAC
PERFORMANCE



Proven Stability

with a purpose-built design to meet
the CDC guidelines for vaccine storage

Best-In-Class Delivery • Largest Finished Goods Inventory

accucold.com • 1.888.4.MEDLAB



Learn more online at accucold.com.

For additional assistance, please refer to the directory below.

Sales Assistance:

888.4.MEDLAB ext. 509

info@accucold.com

Service Help:

888.4.MEDLAB ext. 508

service@summitappliance.com

Technical Support:

888.4.MEDLAB ext. 513

techsupport@summitappliance.com

Replacement Parts:

888.4.MEDLAB ext. 512

parts@summitappliance.com

Professional Cold Storage Designed and Purpose-Built for Biotech, Medical, Life Science, and Pharmacy